

| | |
|--------------------------------|---------|
| Size <ligne> | 13 ½''' |
| Height <mm> | 4.13 |
| Accuracy <per Month> | ±20 sec |
| Battery Life | 5 years |

*60 minutes chronograph operation per day




Battery consumption could be minimum by pulling out the stem

| | |
|---------------------------------|---|
| Balance Weight <µN.m> | Minute 0.40 Chrono Second 0.11 Small 0.02 |
|---------------------------------|---|

Featured by Shock Detection

| | |
|------------------|--|
| Clearance | |
|------------------|--|


| | |
|-------------------------|--------|
| Original Package | 500pcs |
|-------------------------|--------|

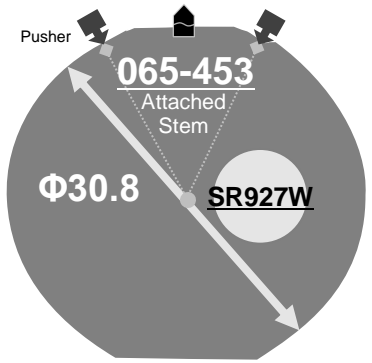

Time measurement

Accuracy

The unit (gate) time of measurement must be set at "10 sec." and the measurement must be performed in the form of complete watch.

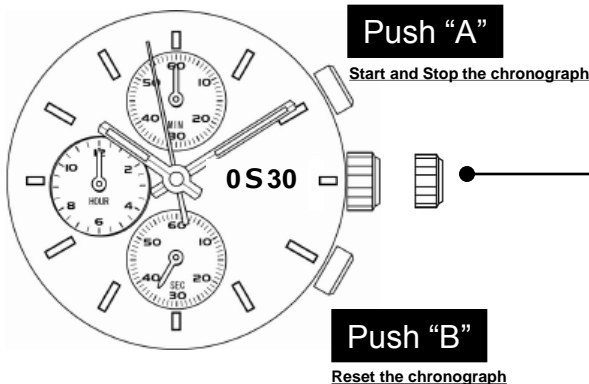

Setting the Time

Set CHRONOGRAPH hands to reset

Push A to reset the hands position to the ZERO position.
And continue to push A to put them forward