




DH5~DH6=22287 (±20)

Coordinates			
Mark	X	Y	R
GM	0	0	—
DH5	-8759	6900	—
DH6	8251	-7500	—
a 1	2351	11100	200
a 2	7235	9131	200
a 3	10800	3490	500
a 4	10800	-3490	500
a 5	3490	-10800	500
a 6	-2700	-11100	200
a 7	-5389	-10216	300
a 8	-10800	-3490	500
a 9	-10800	3490	500
a 10	-3490	10800	500
b 1	9581	6360	150
b 2	7928	8331	150
b 3	-5773	9946	150
b 4	-7839	8415	150
b 5	-9572	-6374	150
b 6	-7916	-8342	150
b 7	9196	-6906	150
b 8	10501	-4690	150

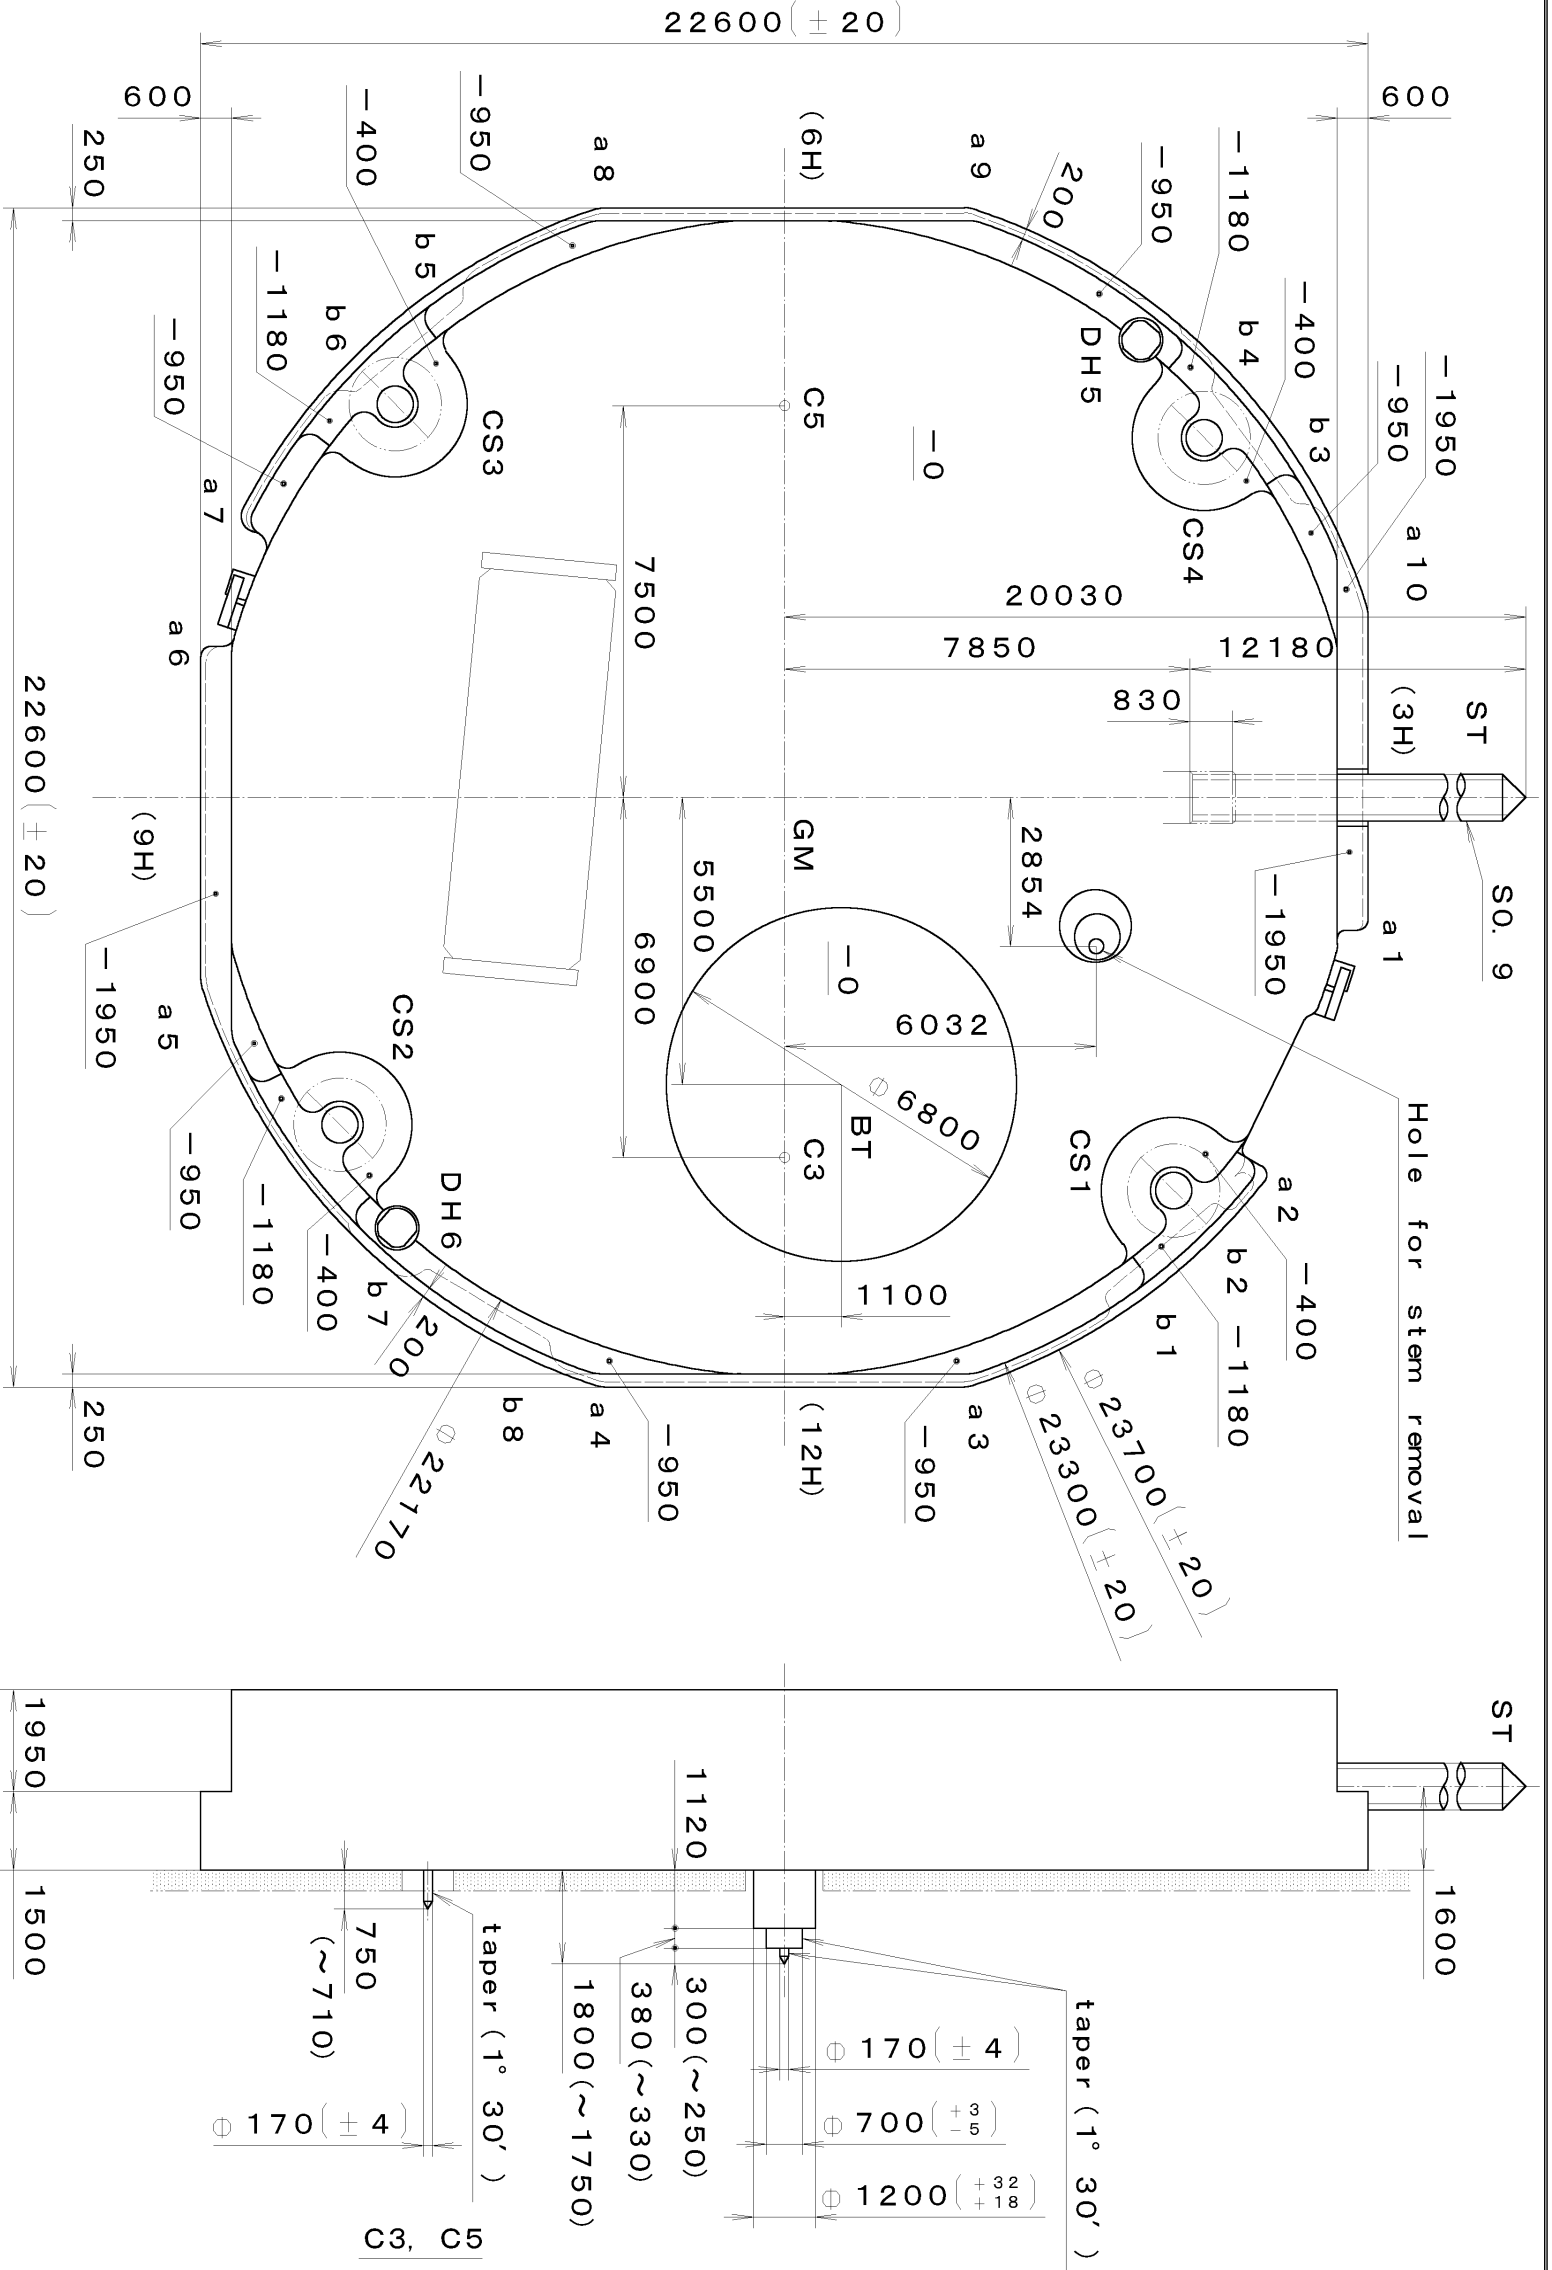

Section b1~b8



Section CS1~4


	H
With Battery strap	3600
Without Battery strap	3450

Quantity	Unit	Scale	Date	Drawn	Checked	Approved	Name
	1/1000 mm	7:1				T. Hiruta	Frame for Case
Material							Drawing No. : 6P23C000
Heat Treatment							
Hardness							
Plating							
General Tolerances							
Dimensions							
Angles							

MIYOTA

This drawing is provisional and subject to our reconfirmation and/or revision without notice.


*** T I P W 6P23-00A (01) *** (2100 1121) 02-10-16

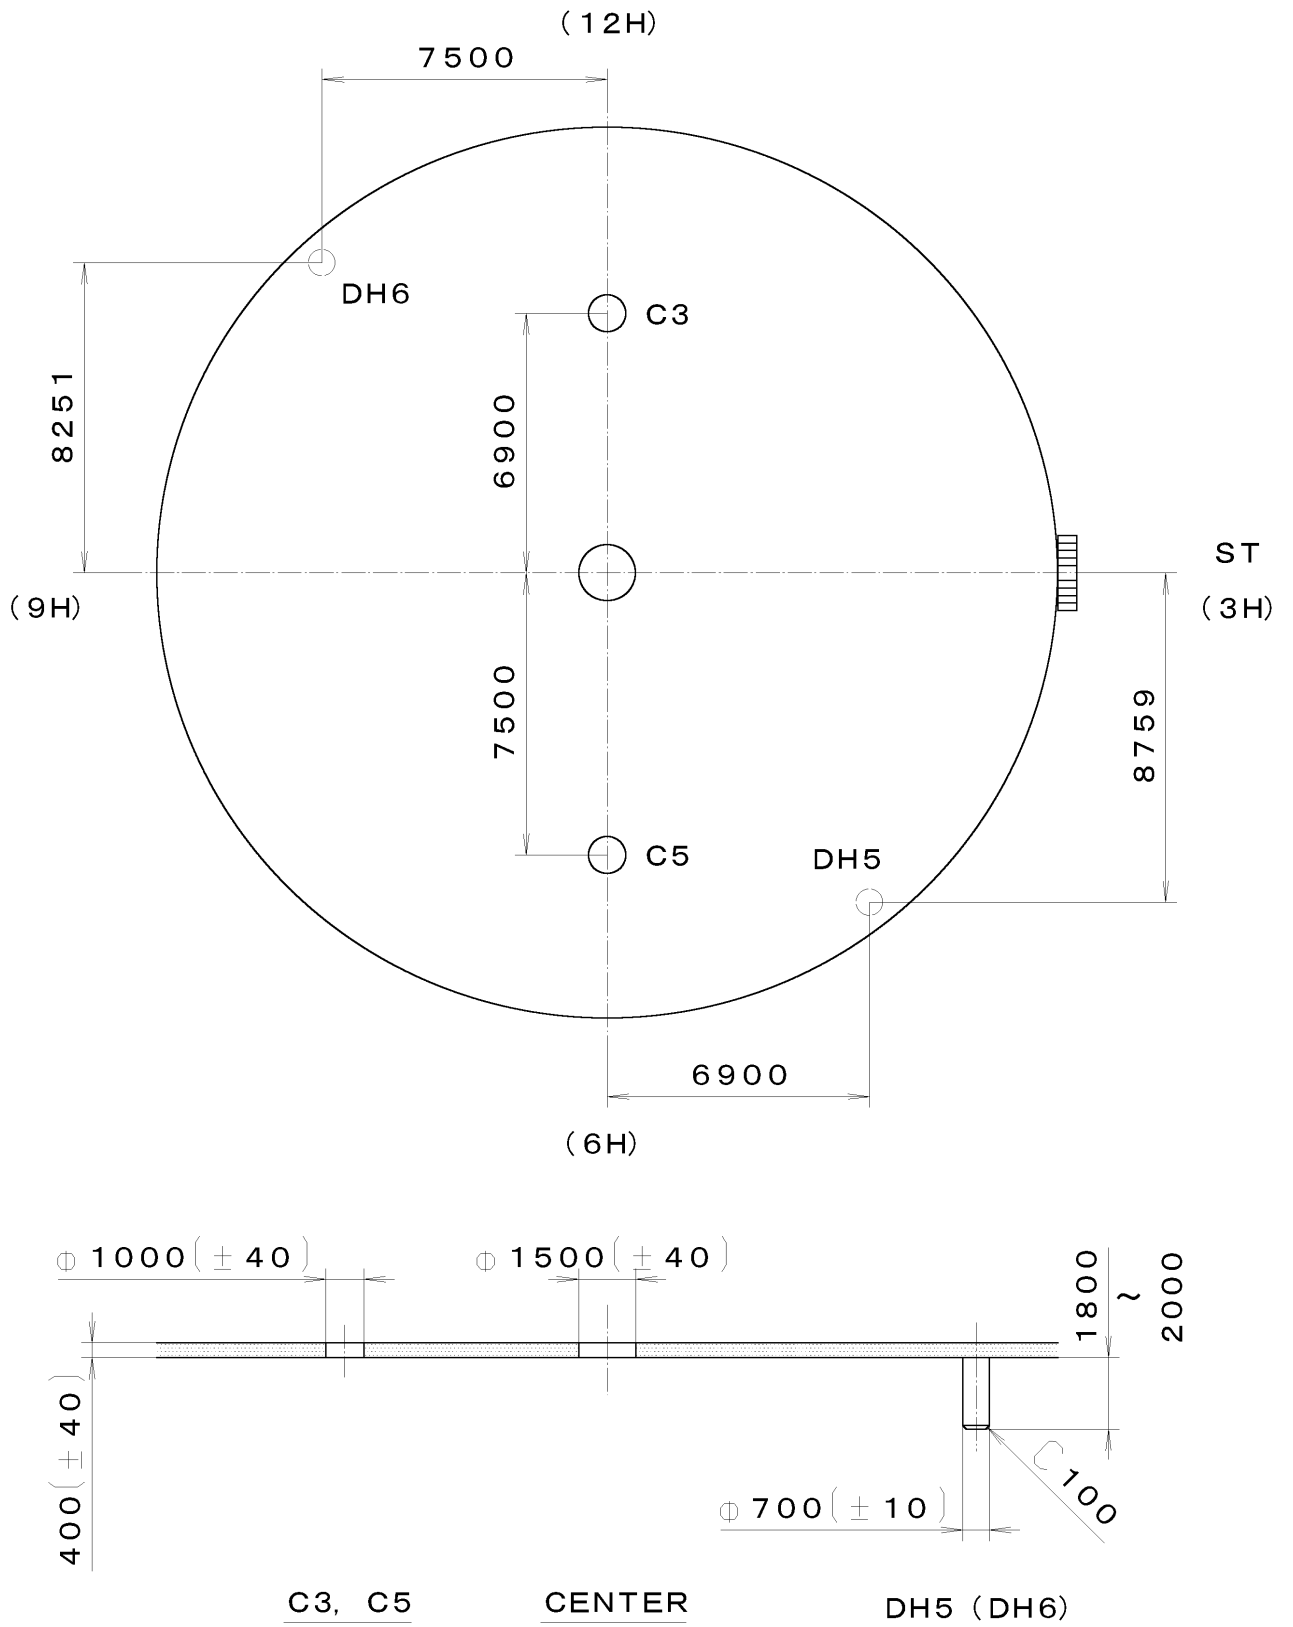

7			Quantity		Cal. No. :	6P23-00A
6			Unit	1/1000 mm	Parts:	
5			Scale	5:1	Name:	Indications for Dial
4			Date		Drawing No. :	
3			Drawn			
2			Checked	T. Hiruta		
1			Approved			
Material			General Tolerances			MIYOTA
Heat Treatment			Dimensions			
Hardness			Angles			
Plating						

2010/05/12 (17:15:34)

This drawing is provisional and subject to our reconfirmation and/or revision without notice.

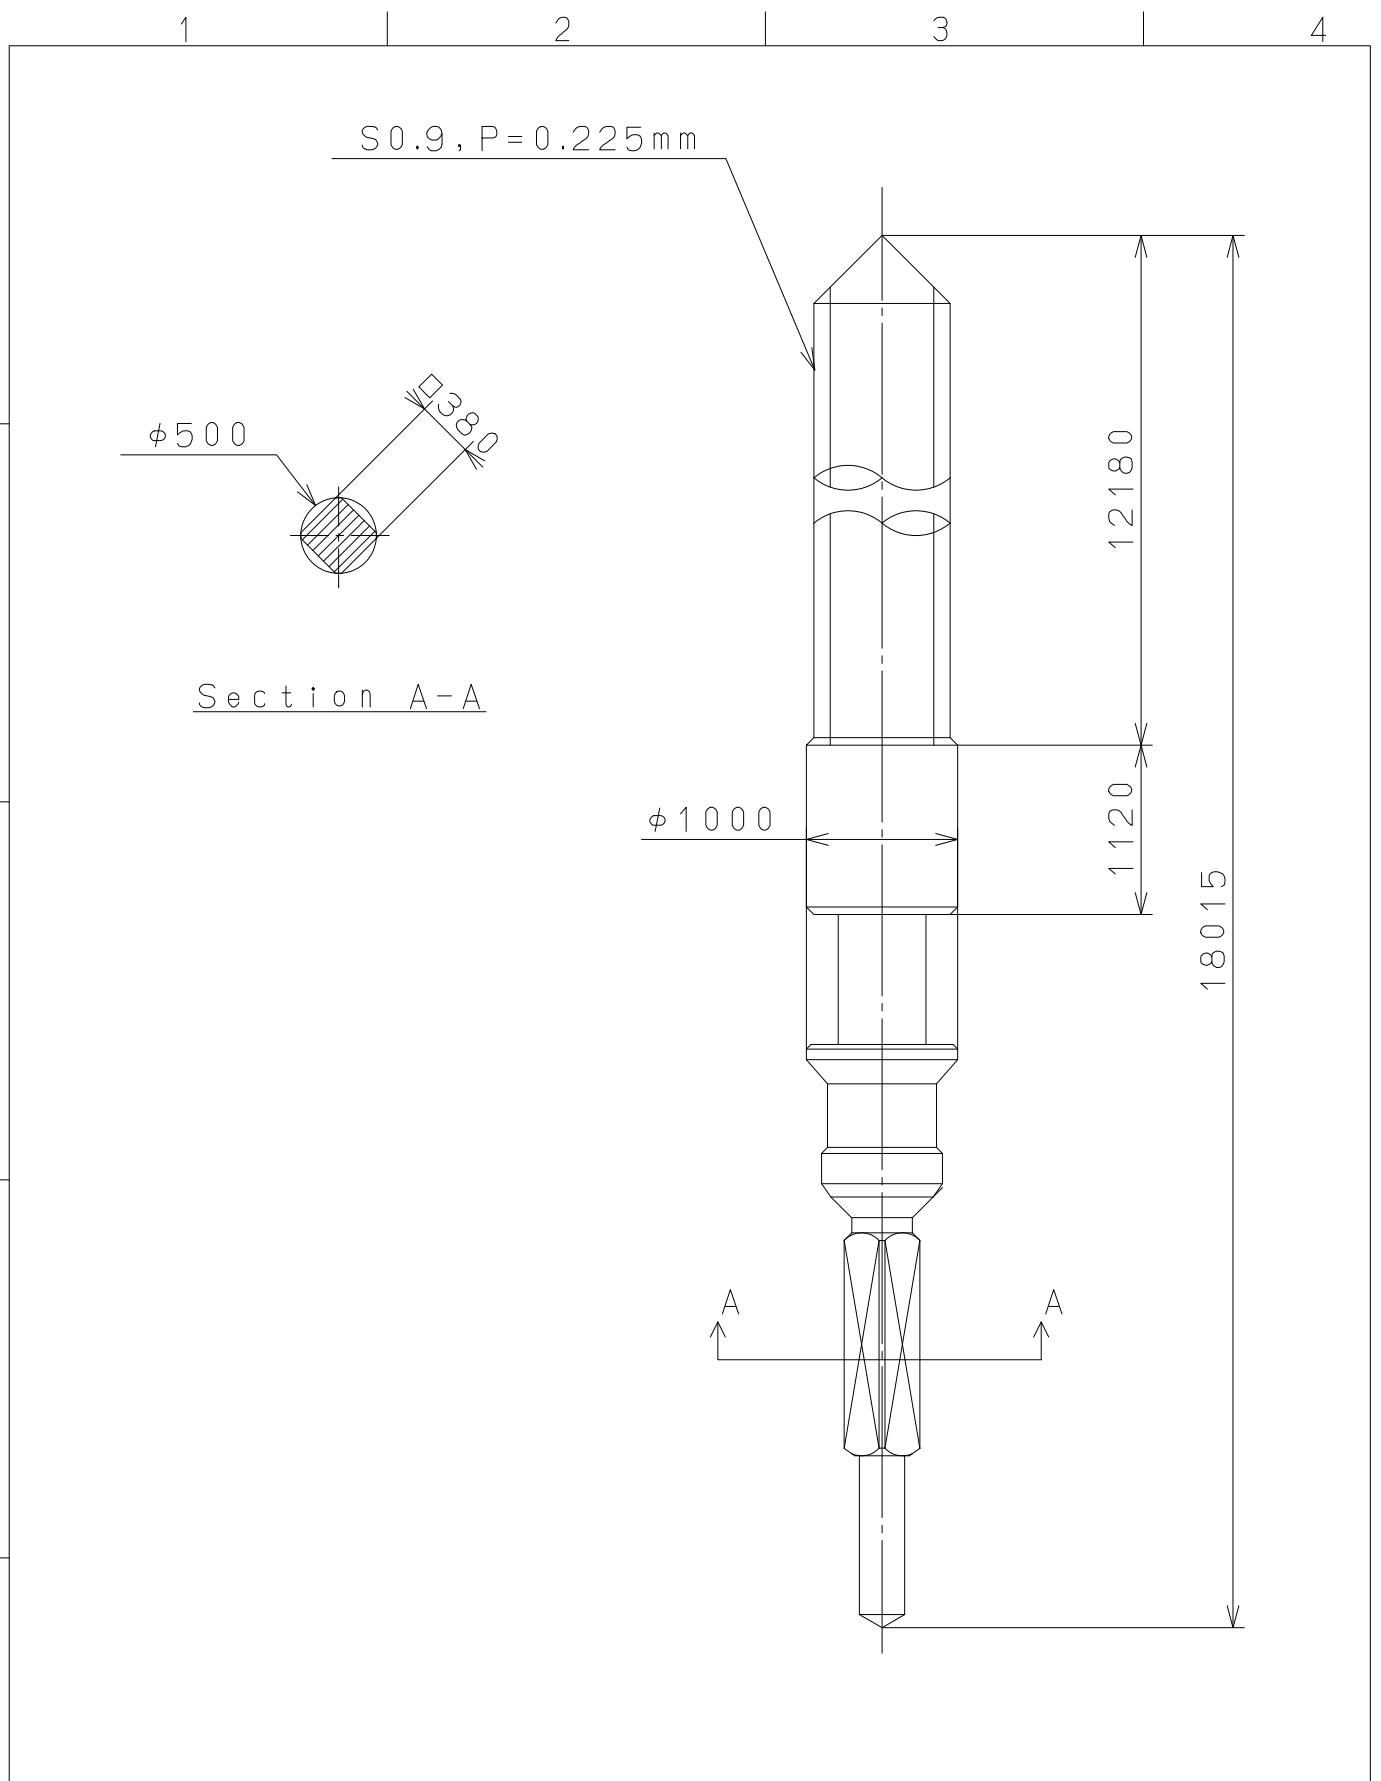

△5			Quantity		Cal.NO.:
△4			Unit	1/1000mm	
△3			Scale	20:1	Parts No.:
△2			Date		065-379
△1			Drawn		
Mark	Date	Description	Appro.	Checked	T.Hiruta
Alterations			Approved	Name:	
			SETTING STEM		
Material					Drawing No.:3790S000
Heat Treatment					MIYOTA
Hardness					
Plating					
			General Tolerances	CITIZEN WATCH CO.,LTD. TOKYO,JAPAN	
			Dimensions		
			Angles		