

<b>Size</b> <ligne>	12 ½”
<b>Height</b> <mm>	4.30
<b>Accuracy</b> <per Month>	±20 sec
<b>Battery Life</b>	2 years

\*30 minutes chronograph operation per day

Battery consumption could be minimum by pulling out the stem




<b>Balance Weight</b> <µN.m>	Minute 0.40 Second 0.09 Small 0.02
---------------------------------	--

Featured by Shock Detection

<b>Clearance</b>	
------------------	--

Clearance changes subject to the glass, case structure, and the length of the hand.

<b>Original Package</b>	500pcs
-------------------------	--------

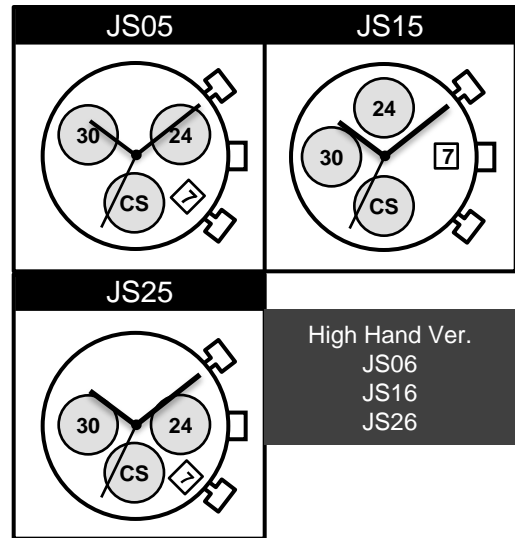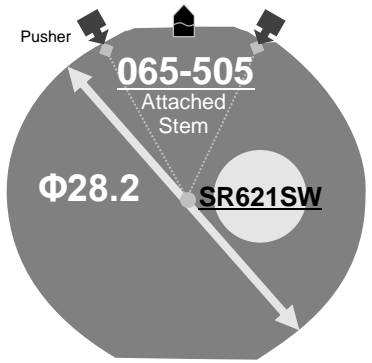

High Hand Ver.  
JS06  
JS16  
JS26

**Time measurement**

**Accuracy**

The unit (gate) time of measurement must be set at "10 sec." and the measurement must be performed in the form of complete watch.

